

**LIGHT SLIDING SYSTEM**

**OPENING** **MAXIMUM DIMENSIONS** 250x320 8 m<sup>2</sup> **DRIVE** **FOAM DENSITY** 40 Kg/m<sup>3</sup> **PRE-ARRANGEMENT**

**INDUSTRIAL DOORS**  
HYBRID DOORS  
COMMERCIAL DOORS  
GUILLOTINE DOORS  
HIGH SPEED DOORS

**INDUSTRIAL DOORS**  
PVC SWING DOORS  
SERVICE DOORS  
PVC STRIPS CURTAINS  
PORTHOLES  
AIR CURTAINS

# FI 94C

SLIDING PVC PULLEYS

## GENERAL CHARACTERISTICS

- Sliding door type.
- The door slides by aluminum support with PVC pulleys with internal bearings on a high-resistance anodized aluminum alloy guide.
- The door panel is made up of a satin stainless steel (AISI 304) structure.
- External lever handle.
- Internal lever handle.
- Foam density 40 Kg/mc.
- All are regularly supplied with counterframe with Threshold (without threshold on request).
- Manual version are pre-arranged to be fitted with the automatic mechanism.
- Doors are pre-arranged to opening direction reverse.

## CHOICE OF THE DOOR PANEL



- OC** FOR COLD ROOMS UP TO -5°C
- Door panel thickness 95mm.
  - Perimetral and under-door sealing gaskets.



- AC** FOR CONTROLLED ATMOSPHERE ROOMS





- BT** FOR LOW TEMPERATURE ROOMS UP TO -30°C (OUTSIDE THE ROOM)

- Door panel thickness 115mm.
- Double perimetral and under-door sealing gaskets.
- Perimetral heating wire for door panel (between the two gaskets).
- Heating wire for threshold.
- Heating wire for stainless steel counterframe.



## CUSTOMIZE THE PRODUCT

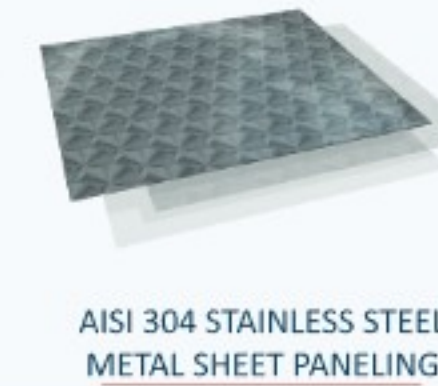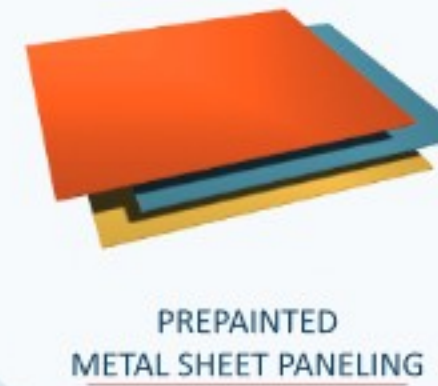

## COUNTERFRAME EXECUTION



## FASTENING SYSTEMS



## FLOOR APPLICATION



## AUTOMATION

- Choice between sliding Manual and sliding Automatic version.
- The automation is realised through a geared motor.
- Electrical box with controlboard and wiring with quick connection.
- Transmission chain.
- Motor with internal encoder (allows to remove the limit switch).
- Cable button opening.
- Safety edge.



## OPTIONALS (UPON REQUEST)

- Connecting plates.
- Guard hood. (Standard for automatic version)
- Remote control by transmitter 9 or 128 canals- 434 Mhz (for sliding automatic doors).
- Fixed porthole.
- Safety photocells.
- Key lock.

MORE OPTIONS UPON REQUEST



ENGLISH

